
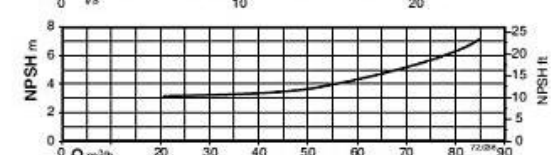
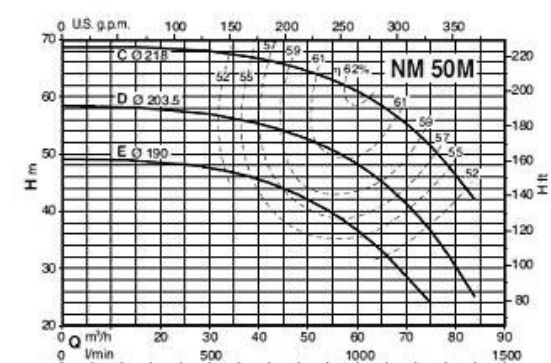
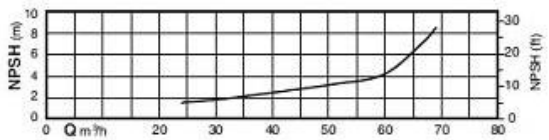
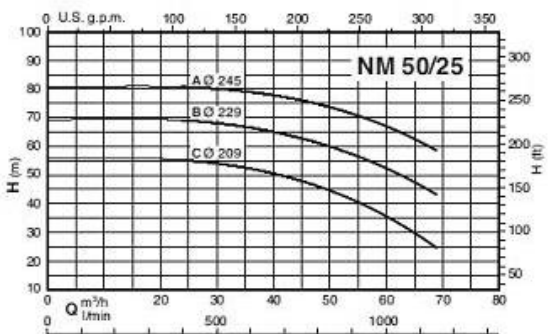
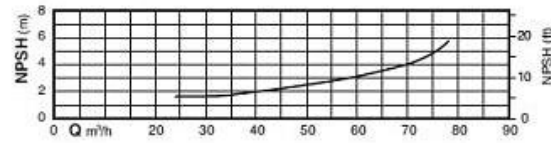
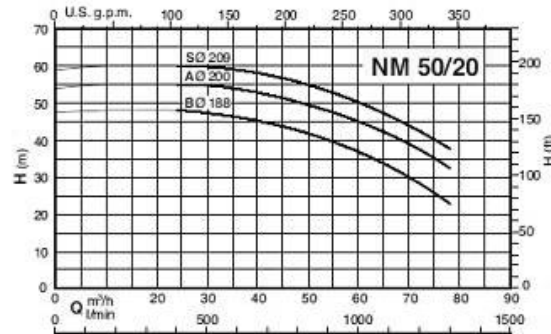
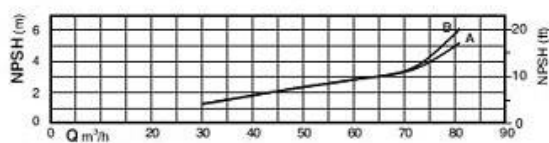
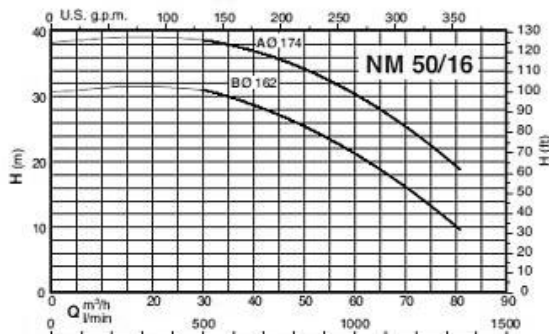
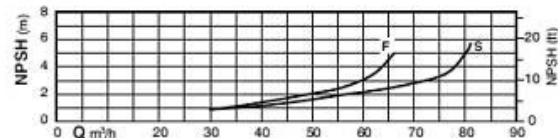



Technisches Datenblatt Spiralgehäuse - Kreiselpumpen

Serie NM Grösse 50

Kennlinien bei	2900 1/min.
Motor 2-polig	50 Hz
Wassertemperatur	20 °C

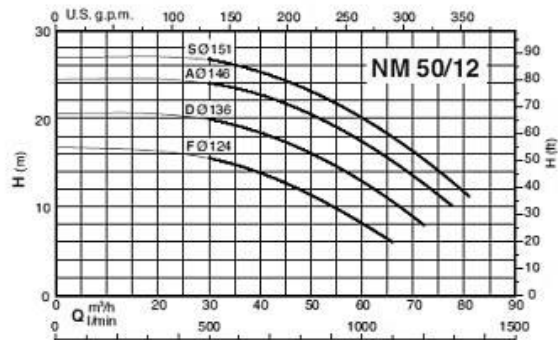

Massbild NM 50

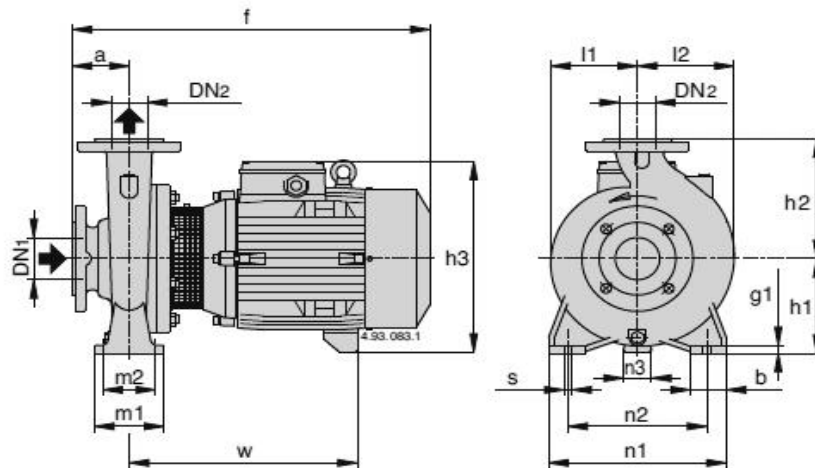

Pumpenmasse 2 - polig, 2900 ¹/min

Pumpentyp	Artikel-Nr.	Bild	Abmessungen in mm													Gewicht kg
			a	f	h1	h2	h3	m1	m2	n1	l1	l2	w	DN1	DN2	
NM 50/12F/B	111.07630	1	100	470	132	160	260	100	70	240	121	137	290	65	50	38
NM 50/12D/B	111.07631	1	100	495	132	160	270	100	70	240	121	137	295	65	50	47
NM 50/12A/B	111.07632	1	100	495	132	160	270	100	70	240	121	137	295	65	50	51
NM 50/12S/B	111.07633	1	100	495	132	160	270	100	70	240	121	137	295	65	50	51
NM 50/16B/B	111.07634	1	100	525	160	180	320	100	70	265	127	141	320	65	50	64
NM 50/16A/B	111.07635	1	100	525	160	180	320	100	70	265	127	141	320	65	50	70
NM 50/20B/B	111.07636	1	100	640	160	200	345	100	70	265	140	153	410	65	50	100
NM 50/20A/B	111.07637	1	100	640	160	200	345	100	70	265	140	153	410	65	50	106
NM 50/20S/B	111.07638	1	100	720	160	200	345	100	70	265	140	153	460	65	50	112
NM 50/25C/B	111.07639	1	100	645	180	225	365	125	95	320	175	175	415	65	50	126
NM 50/25B/B	111.07640	1	100	720	180	225	365	125	95	320	175	175	465	65	50	132
NM 50/25A/B	111.07641	1	100	720	180	225	365	125	95	320	175	175	465	65	50	147
NM 50M/E/A	111.07642	1	100	700	192	225	377	298	258	262	175	175	239	65	50	135
NM 50M/D/A	111.07643	1	100	750	192	225	377	298	258	262	175	175	239	65	50	151
NM 50M/C/A	111.07644	1	100	775	192	225	377	298	258	262	175	175	239	65	50	165

Motordaten MD 50, 2-polig, 2900 ¹/min

Pumpentyp	Leistung kW	Eingangsstrom in Ampere		
		3~230 V	3~400 V	3~690 V
NM 50/12F/B	2.2	9.2	5.3	-
NM 50/12D/B	3	11.5	6.6	-
NM 50/12A/B	4	-	9.6	5.5
NM 50/12S/B	4	-	9.6	5.5
NM 50/16B/B	5.5	-	10.9	6.3
NM 50/16A/B	7.5	-	14.3	8.3
NM 50/20B/B	9.2	-	18.5	10.7
NM 50/20A/B	11	-	21.5	12.4
NM 50/20S/B	15	-	27.3	15.8
NM 50/25C/B	11	-	21.5	12.4
NM 50/25B/B	15	-	27.3	15.8
NM 50/25A/B	18.5	-	34	19.6
NM 50M/E/A	11	-	21.5	12.4
NM 50M/D/A	15	-	27.3	15.8
NM 50M/C/A	18.5	-	34	19.6



BRUNNER AG
 Brunnergässli 1
 CH-8302 Kloten
 Tel. 044 814 17 44
 Fax 044 814 17 75
 mail@brunnerpumpen.ch

BRUNNER AG
 Seefeldstrasse 1
 CH-8280 Kreuzlingen
 Tel. 079 654 01 48
 Fax 071 688 82 37
 www.brunnerpumpen.ch

BRUNNER SA
 Via in Paes 82
 CH-6572 Quartino
 Tel. 091 795 21 26
 Fax 091 795 28 92
 www.brunnerpompe.ch